

Specifications

Sentry I Open-Air with Aqua Booster

Prewired, Continuous Pressure Open-Air System with Aqua-Booster

Description





10 gpm, 24"x48" Tank, 1/2 hp 110v Pump

18 gpm, 30"x60" Tank, 1/2 hp 110v Pump

25 gpm, 39"x48" Tank, 3/4 hp 220v Pump

Specifications			
Continuous Flow	10 gpm	18 gpm	25 gpm
Max Flow	14 gpm	22 gpm	28 gpm
Capacity	100 gal	180 gal	250 gal
Voltage	115 VAC	115 VAC	230 VAC
Operating Current	10 amp	10 amp	6.8 amp
Max Current	12 amp	12 amp	8 amp
Power	1/2 hp	1/2hp	3/4 hp
Freq	60 hz	60 hz	60 hz
Ship Weight	110 lb	125 lb	145 lb

Sentry I	
Pellet Feed Rate (max)	8 pellets per minute
Pellet Feed Rate (min)	1 pellet per 21 minutes
Pellet Storage	5 or 10 lbs container

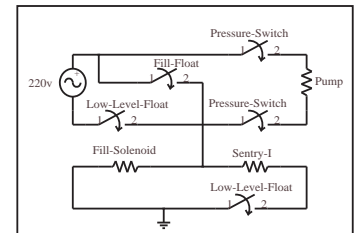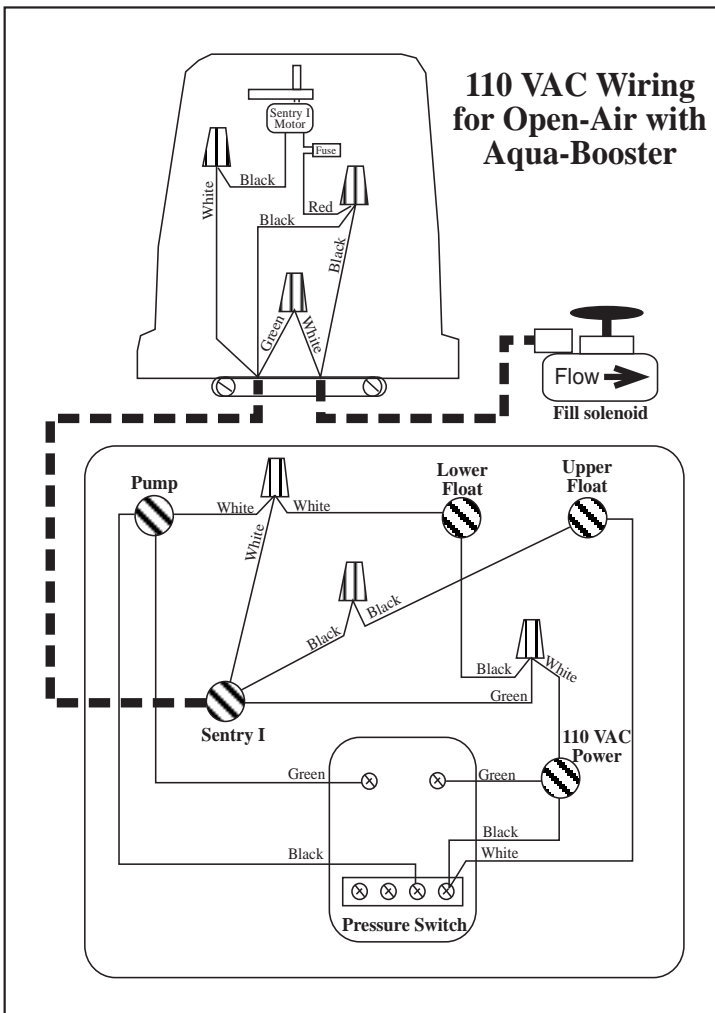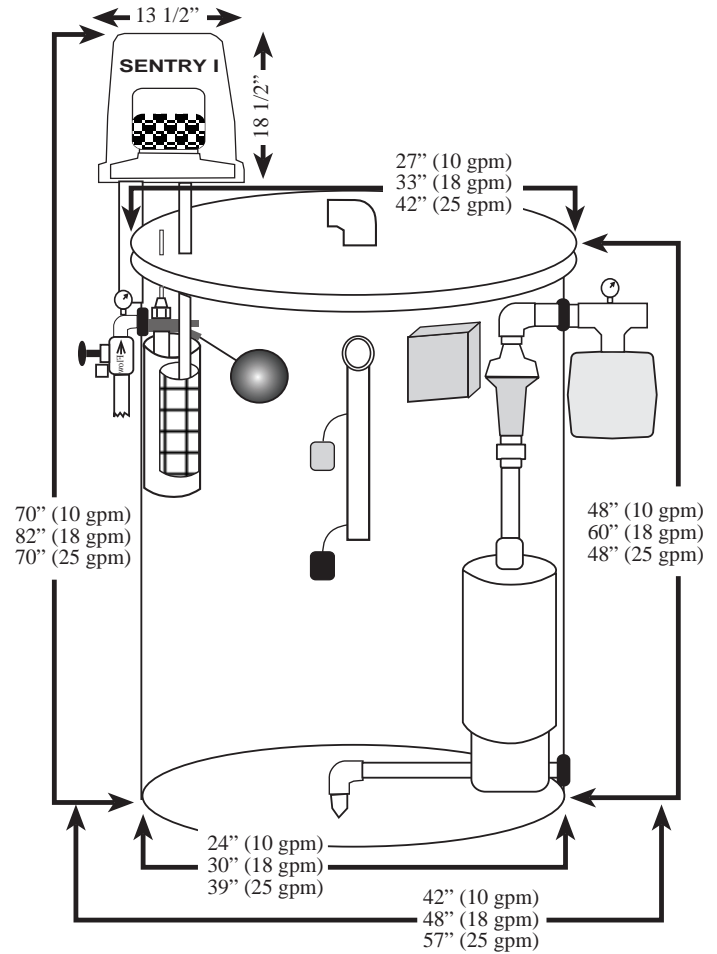

Better Water Industries, Inc.

209 N Tyler St.
Tyler, MN 56178
(507) 247-5929

Fax (507) 247-3416

<http://betterwaterind.com>